

Full Port





Construction:

Split body, full port, free floating ball, "fire-safe" designed to API-607*, blow-out proof stem, extended stuffing box, cavity relieving seats, anti-static design, pressure balance hole in ball and locking device. Designed to API-6D, ASME B16.34 and BS5351 specifications.


Note: Manufactured and conforms to NACE standard MR 0175
* API-607 "fire-safe" tested and certified, 1/2" thru 6" size.

Dimensions

Face to Face	ASME B 16.10 & API 6D Long Pattern
End Flange	ASME B 16.5
Min. Port	API 6D
Min. Wall Thick.	ASME B 16.34 & BS 5351

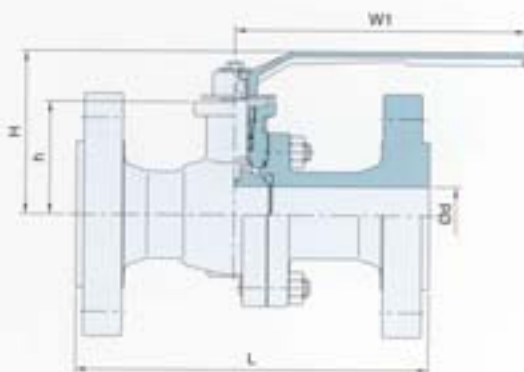

Size 1/2-3 inch



Size 4-6 inch



Size 3-6 inch

Class 600

Valve Size		1/2" 15mm	3/4" 20mm	1" 25mm	1 1/2" 40mm	2" 50mm	3" 80mm	4" 100mm	6" 150mm	
Od	inch	0.59	0.79	0.98	1.50	1.97	2.99	3.94	5.98	
	mm	15	20	25	38	50	76	100	152	
L	RF	inch	6.50	7.52	8.50	9.49	11.50	14.02	17.01	22.01
		mm	165	191	216	241	292	356	432	559
	RTJ	inch	6.50	7.52	8.50	9.49	11.61	14.13	17.13	22.13
		mm	165	191	216	241	295	359	435	562
h	inch	20.5	2.19	2.44	3.27	3.86	5.75	7.36	9.17	
	mm	52	55.5	62	83	98	146	187	233	
H	inch	3.46	3.62	4.17	5.00	5.59	7.68	9.76	11.61	
	mm	88	92	106	127	142	195	248	295	
W1	inch	5.51	6.69	6.69	9.84	9.84	13.78	31.50	31.50	
	mm	140	170	170	250	250	350	800	800	
W2	inch	N/A	N/A	N/A	N/A	N/A	11.81	15.75	19.69	
	mm	N/A	N/A	N/A	N/A	N/A	300	400	500	
Approx. Weight	600	Lb	8	11	15	29	59	117	205	389
		kg	3.7	5	7	13	27	53	93	176

Gear operators are available for most sizes.