

Reduced Port





Construction:

Split body, reduced port, free floating ball, "fire-safe" designed to API-607*, blow-out proof stem, extended stuffing box, cavity relieving seats, anti-static design, pressure balance hole in ball and locking device. Designed to API-6D, ASME B 16.34 and BS 5351 specifications.


Note: Manufactured and conforms to NACE standard MR 0175 * API-607 "fire-safe" tested and certified, 2" thru 8" size.

Dimensions


Face to Face	ASME B 16.10 & API 6D Long Pattern
End Flange	ASME B 16.5
Min. Port	API 6D
Min. Wall Thick.	ASME B 16.34 & BS 5351

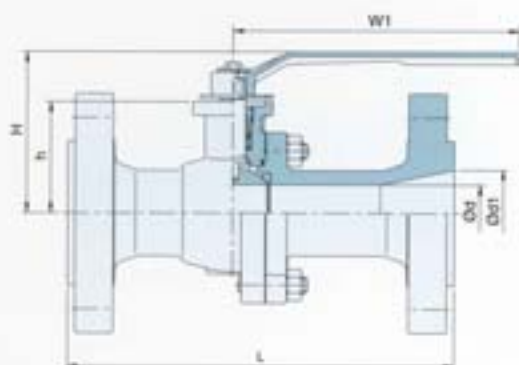

Size 2-4 inch



Size 6-8 inch



Size 4-8 inch

Class 600

Valve Size			2"	3"	4"	6"	8"
			50mm	80mm	100mm	150mm	200mm
od / od1	inch		1.50 / 2.00	2.00 / 3.00	3.00 / 4.00	4.00 / 6.00	6.00 / 8.00
	mm		38 / 50	50 / 76	76 / 100	100 / 152	152 / 203
L	RF	inch	11.50	14.02	17.01	22.01	25.98
		mm	292	356	432	559	660
	RTJ	inch	11.61	14.13	17.13	22.13	26.10
		mm	295	359	435	562	663
h	inch	3.27	3.86	5.75	7.36	9.17	
	mm	83	98	146	187	233	
H	inch	5.00	5.59	7.68	9.76	11.61	
	mm	127	142	195	248	295	
W1	inch	9.84	9.84	13.78	31.50	31.50	
	mm	250	250	350	800	800	
W2	inch	N/A	N/A	11.81	15.75	19.69	
	mm	N/A	N/A	300	400	500	
Approx. Weight	600	Lb	40	66	147	262	400
		kg	18	30	67	120	182

Gear operators are available for most sizes.